



# HSG73P-RT High Temperature Flat Chip Resistors (Anti Sulfuration)

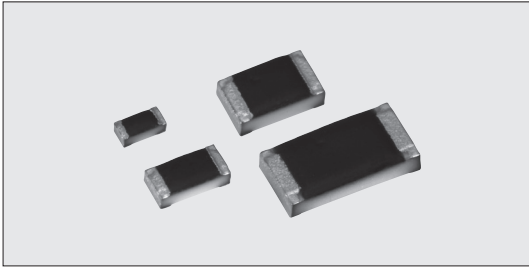

Coating color : Black

## Construction

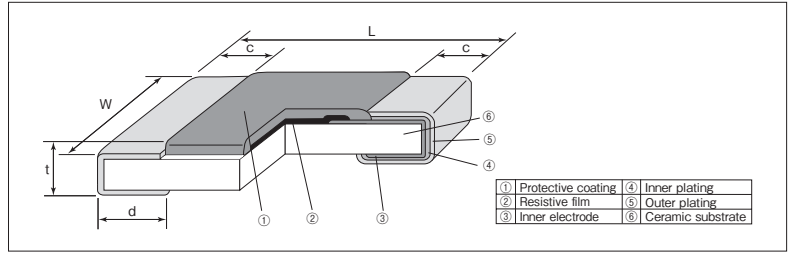

## Features

- Excellent anti-sulfuration characteristic due to using high sulfuration-proof inner top electrode material.
- High heat resistance that can be used even at high temperatures of 155°C or higher. The maximum operating temperature of Sn plating products compatible with solder mounting is 175°C.
- Excellent heat resistance and weather resistance are ensured by the use of metal glaze thick film.
- High stability and high reliability with the triple-layer structure of electrode.
- Superior to RK73 series chip resistors pulse withstanding voltage and high power.
- Applicable to various kinds of automatic mounters for taping, etc.
- Products meet EU-RoHS requirements. EU-RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Tested.

## Reference Standards

- IEC 60115-8
- JIS C 5201-8
- EIAJ RC-2134C

## Dimensions

Type (Inch Size Code)	Dimensions (mm)					Weight (g) (1000pcs)
	L	W	c	d	t	
1E (0402)	1.0 <sup>+0.1</sup> <sub>-0.05</sub>	0.5±0.05	0.2±0.15	0.25 <sup>+0.05</sup> <sub>-0.1</sub>	0.35±0.05	0.68
1J (0603)	1.6±0.2	0.8±0.1	0.3±0.15	0.3±0.1	0.45±0.1	2.14
2A (0805)	2.0±0.2	1.25±0.1	0.4±0.25	0.3 <sup>+0.2</sup> <sub>-0.1</sub>	0.5±0.1	4.54
2B (1206)	3.2±0.2	1.6±0.2	0.55±0.35	0.4 <sup>+0.2</sup> <sub>-0.1</sub>	0.6±0.1	9.14

## Type Designation

Example

Product Code	Power Rating	Characteristic	Terminal Surface Material	Taping	Nominal Resistance	Resistance Tolerance
HSG73P	2B	R	T	TD	103	J
	1E: 0.125W 0.2W <sup>#1</sup> 1J: 0.2W 0.33W <sup>#1</sup> 2A: 0.25W 0.5W <sup>#1</sup> 2B: 0.33W 0.75W <sup>#1</sup>	R: Anti sulfuration	T: Sn	TP: 2mm pitch punch paper TD: 4mm pitch punch paper BK: Bulk	F: 4 digits J: 3 digits	F: ± 1% J: ± 5%

Contact us when you have control request for environmental hazardous material other than the substance specified by EU-RoHS.

For further information on taping, please refer to APPENDIX C on the back pages.

Type	Power Rating	Rated Ambient Temp.	Rated Terminal Part Temp.	T.C.R. (×10 <sup>-6</sup> /K)	Resistance Range(Ω)		Max. Working Voltage	Max. Overload Voltage	Packaging & Q'ty/Reel (pcs)	
					F: ±1% E24	J: ±5% E24			TP	TD
1E	0.125W	70°C	125°C	±200	10~1M	1~10M	75V	100V	10,000	-
	0.2W <sup>#1</sup>	70°C	105°C							
1J	0.2W	70°C	135°C	±200	10~1M	1~10M	150V	200V	-	5,000
	0.33W <sup>#1</sup>	70°C	125°C							
2A	0.25W	70°C	125°C	±200	10~1M	1~10M	200V	400V	-	5,000
	0.5W <sup>#1</sup>	70°C	100°C							
2B	0.33W	70°C	125°C	±200	10~1M	1~10M	200V	400V	-	5,000
	0.75W <sup>#1</sup>	70°C	105°C							

Operating Temperature Range : -55°C ~ +175°C


Rated voltage = √(Power Rating × Resistance value) or Max. working voltage, whichever is lower.

※1 If you use at the rated power, please keep the condition that the terminal of the resistor is below the rated terminal part temperature. Please refer to the derating curves based on the terminal temperature of right side on the next page.


If any questions arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature" in your usage conditions, please give priority to the "Rated Terminal Part Temperature".

For more details, please refer to "Introduction of the derating curves based on the terminal part temperature" on the beginning of our catalog.

## Derating Curve

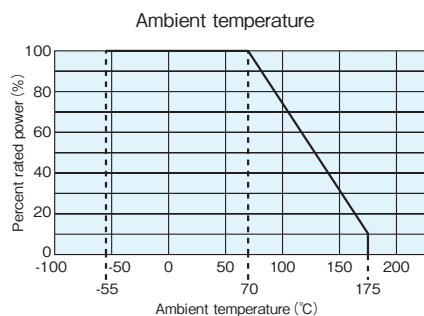


For resistors operated at an ambient temperature of 70°C or higher, the power shall be derated in accordance with the above derating curve.

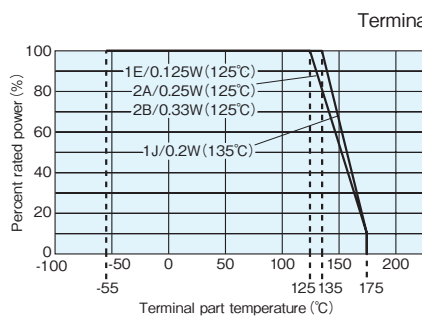

When the terminal part temperature of the resistor exceeds the rated terminal part temperature shown above, the power shall be derated according to the derating curve.

If you want to use at the rated power of ※1, please use the derating curves based on the terminal part temperature of right side. ※Please refer to "Introduction of the derating curves based on the terminal part temperature" on the beginning of our catalog before use.

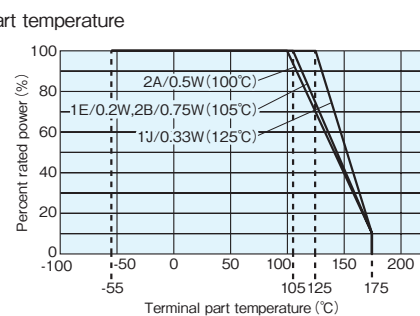

## Performance

Test Items	Performance Requirements $\Delta R \pm (\% + 0.1 \Omega)$		Test Methods
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C, +25°C/+125°C
Overload (Short time)	2	0.5	Rated voltage × 2.5 for 5s (2B : Rated voltage × 2 for 5s)
Rapid change of temperature	0.5	0.3	-55°C (30min.) / +125°C (30min.) 100 cycles
Moisture resistance	2 : 1J, 2A, 2B 3 : 1E	0.75 : 1J, 2A, 2B 1 : 1E	40°C ± 2°C, 90%~95%RH, 1000h 1.5h ON/0.5h OFF cycle
Endurance at 70°C	2 : 1J, 2A, 2B 3 : 1E	0.75 : 1J, 2A, 2B 1 : 1E	70°C ± 2°C 1000h 1.5h ON/0.5h OFF cycle
Endurance at 175°C	1	0.3	+175°C, 1000h, Power Rating × 10%
Sulfuration test	5	0.2	Soaked in industrial oil with sulfur substance 3.5% contained 105°C ± 3°C 500h

Please refer to conventional products for characteristic data such as temperature rise.

## Precautions for Use

- The substrate of chip resistors is alumina. Cracks may occur at the connection due to the difference of the coefficient of thermal expansion from a mounting board when heat stress like heat cycle, etc. are repeatedly given to them. Care should be taken to the occurrence of the cracks when the change in ambient temperature or ON/OFF of load is repeated. The occurrence of the crack by heat stress may be influenced by the size of a pad, heat radiation of mounting board etc., so please pay careful attention to designing when a big change in ambient temperature and conditions for use like ON/OFF of load can be assumed.