



RK73G-RT Flat Chip Resistors (Ultra Precision Grade, Anti Sulfuration)

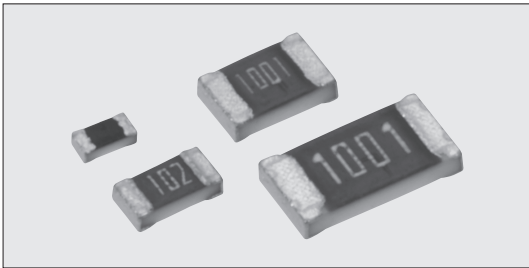

Coating color : Black (1E),
Dark blue (1J, 2A, 2B)

Construction

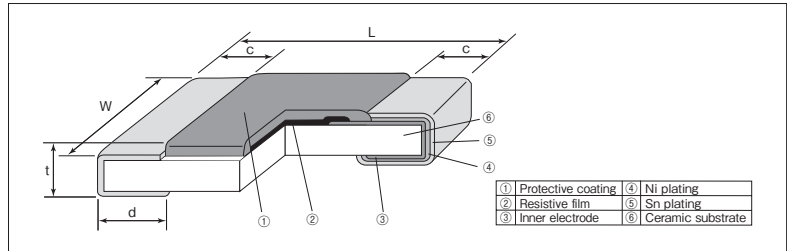

Features

- Excellent anti-sulfuration characteristic due to using high sulfuration-proof inner top electrode material.
- Metal-glaze thick film resistor for surface mounting.
- High precision resistor with T.C.R. $\pm 50 \times 10^{-6}/K$ and tolerance $\pm 0.25\%$.
- Suitable for both flow and reflow solderings.
- Products with lead free termination meet EU-RoHS requirements. EU-RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Tested.

Applications

- Car electronics, power supply, industrial robot.
- Replacement of metal film chip resistors.

Reference Standards

IEC 60115-8
JIS C 5201-8
EIAJ RC-2134C

Dimensions

| Type (Inch Size Code) | Dimensions (mm) | | | | | Weight (g) (1000pcs) |
|--------------------------|--------------------------------------|----------|---------|---------------------------------------|-----------|-------------------------|
| | L | W | c | d | t | |
| 1E (0402) | 1.0 ^{+0.1} _{-0.05} | 0.5±0.05 | 0.2±0.1 | 0.25 ^{+0.05} _{-0.1} | 0.35±0.05 | 0.68 |
| 1J (0603) | 1.6±0.2 | 0.8±0.1 | 0.3±0.1 | 0.3±0.1 | 0.45±0.1 | 2.14 |
| 2A (0805) | 2.0±0.2 | 1.25±0.1 | 0.4±0.2 | 0.3 ^{+0.2} _{-0.1} | 0.5±0.1 | 4.54 |
| 2B (1206) | 3.2±0.2 | 1.6±0.2 | 0.5±0.3 | 0.4 ^{+0.2} _{-0.1} | 0.6±0.1 | 9.14 |

Type Designation

Example

| RK73G | 2A | R | T | TD | 1002 | D |
|--------------|---|---------------------|---------------------------|---|--------------------|---------------------------------|
| Product Code | Power Rating | Characteristic | Terminal Surface Material | Taping | Nominal Resistance | Resistance Tolerance |
| | 1E : 0.1W 1J : 0.1W 2A : 0.125W 2B : 0.25W | R: Anti sulfuration | T : Sn | TPL: TP: 2mm pitch punch paper TD: 4mm pitch punch paper TE: 4mm pitch plastic embossed BK: Bulk | 4 digits | C: ±0.25% D: ±0.5% F: ±1% |

Contact us when you have control request for environmental hazardous material other than the substance specified by EU-RoHS.

For further information on taping, please refer to APPENDIX C on the back pages.

Ratings

| Type | Power Rating | Rated Ambient Temp. | Rated Terminal Part Temp. | T.C.R. ($\times 10^{-6}/K$) | Resistance Range (Ω) | | | Max. Working Voltage | Max. Overload Voltage | Packaging & Q'ty /Reel (pcs) | | | |
|------|--------------|---------------------|---------------------------|----------------------------------|-------------------------------|-----------------------|---------------------|----------------------|-----------------------|------------------------------|------------|-------|---------------------|
| | | | | | C: ±0.25% E24 · E96 | D: ±0.5% E24 · E96 | F: ±1% E24 · E96 | | | TPL · TP | TD | TE | |
| 1E | 0.1W | 70°C | 125°C | ±50 | — | 30~1M | 30~1M | 50V | 100V | TPL: 20,000 TP: 10,000 | — | — | |
| 1J | 0.1W | | | | 100~1M | | | 30~1M | 75V | 150V | TP: 10,000 | 5,000 | — |
| 2A | 0.125W | | | | | | | | 150V | 200V | — | 5,000 | 4,000 ^{#1} |
| 2B | 0.25W | | | | | | | | 200V | 400V | — | 5,000 | 4,000 ^{#1} |

Operating Temperature Range : $-55^{\circ}C \sim +155^{\circ}C$

Rated voltage = $\sqrt{\text{Power Rating} \times \text{Resistance value}}$ or Max. working voltage, whichever is lower.


※1 Standard packaging : TD(4mm pitch punch paper)

If any questions arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature" in your usage conditions, please give priority to the "Rated Terminal Part Temperature".

For more details, please refer to "Introduction of the derating curves based on the terminal part temperature" on the beginning of our catalog.


Derating Curve

Ambient temperature

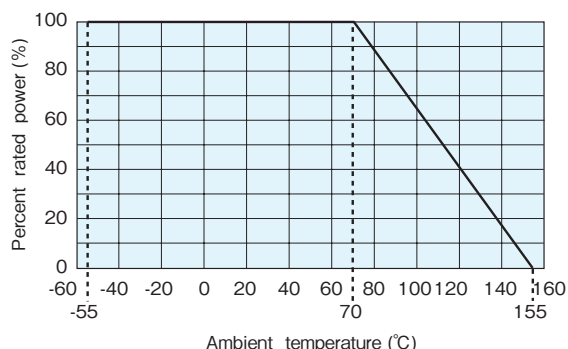

For resistors operated at an ambient temperature of 70°C or higher, the power shall be derated in accordance with the above derating curve.

Terminal part temperature

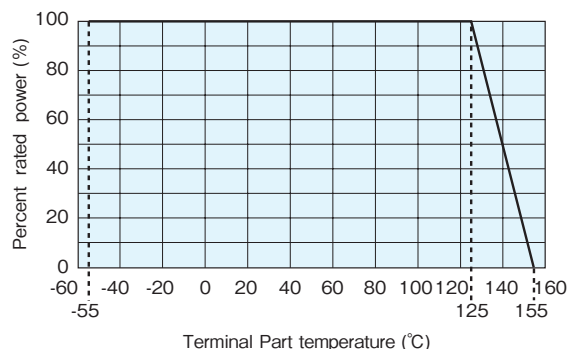

When the terminal part temperature of the resistor exceeds the rated terminal part temperature shown above, the power shall be derated according to the derating curve.

*Please refer to "Introduction of the derating curves based on the terminal part temperature" on the beginning of our catalog before use.

Performance

| Test Items | Performance Requirements $\Delta R \pm (\% + 0.1 \Omega)$ | | Test Methods |
|--|---|----------------------------|---|
| | Limit | Typical | |
| Resistance | Within specified tolerance | — | 25°C |
| T.C.R. | Within specified T.C.R. | — | +25°C/-55°C and +25°C/+125°C |
| Overload(Short time) | 2 | 0.6 | Rated voltage $\times 2.5$ for 5s (1E, 2B : Rated voltage $\times 2$ for 5s) |
| Resistance to soldering heat | 1 | 0.4 | 260°C $\pm 5^\circ\text{C}$, 10s ± 1 s |
| Rapid change of temperature | 0.5 | 0.3 | -55°C(30min.)/+125°C(30min.)100 cycles |
| Moisture resistance | 3 : 1E 2 : 1J, 2A, 2B | 1 : 1E 0.6 : 1J, 2A, 2B | 40°C $\pm 2^\circ\text{C}$, 90%~95%RH, 1000h 1.5h ON/0.5h OFF cycle |
| Endurance at 70°C or rated terminal part temperature | 3 : 1E 2 : 1J, 2A, 2B | 1 : 1E 0.6 : 1J, 2A, 2B | 70°C $\pm 2^\circ\text{C}$ or rated terminal part temperature $\pm 2^\circ\text{C}$ 1000h 1.5h ON/0.5h OFF cycle |
| High temperature exposure | 1 | 0.6 | +155°C, 1000h |
| Sulfuration test | 5 | 0.2 | Soaked in industrial oil with sulfur substance 3.5% contained 105°C $\pm 3^\circ\text{C}$ 500h |

Please refer to conventional products for characteristic data such as temperature rise.

Precautions for Use

- The substrate of chip resistors is alumina. Cracks may occur at the connection of solder (solder fillet portion) due to the difference of the coefficient of thermal expansion from a mounting board when heat stress like heat cycle, etc. are repeatedly given to them. Care should be taken to the occurrence of the cracks when the change in ambient temperature or ON/OFF of load is repeated. The occurrence of the crack by heat stress may be influenced by the size of a pad, solder volume, heat radiation of mounting board etc., so please pay careful attention to designing when a big change in ambient temperature and conditions for use like ON/OFF of load can be assumed.